

Lexmark X646e



LEXMARKTM

Lexmark X646e MFP

The Lexmark X646e MFP with a customizable e-Task touch screen provides print, copy, fax and scan functions with advanced authentication, secure document printing and device management. Lexmark's Embedded Solutions Framework is a standard feature that allows your MFP to grow with your business needs.



In the Box

Lexmark X646e MFP

- X646e MFP
- 21,000-page Return Program Print Cartridge¹
- 40+ GB Hard Drive
- Setup Sheet
- Software and Documentation CD
- Power Cord
- RJ-11 Phone Cable

Product Specifications

Part Number	22G0325
Product Class	Workgroup laser MFP
Speed	Up to 50 ppm
Time to First Page	As fast as 8.5 seconds
Print Resolution	1200 x 1200 dpi, 2400 image quality printing, 600 x 600 dpi
Processor	533 MHz
Memory (std./max.)	256MB/768MB
Connectivity Standard Optional Option Slots	USB, Ethernet, USB Direct Interface Parallel, Serial, Wireless, Gigabit Ethernet, Fiber Optic DRAM DIMM slots: 1; ISP (INA) slots: 1; Firmware Card/Flash memory slots: 2
Printer Languages	PostScript 3, PCL 6 and PPDS Migration Tool
Direct Print Formats	jpeg, tiff, gif, bmp, png, pcx, dcx, pdf v1.5, html
Fonts	PostScript: 158 scalable; PCL: 89 scalable including OCR-A, OCR-B and Code 3 of 9 bar codes, 2 bitmapped; PPDS: 39 scalable, 5 bitmapped
Copy	Speed: up to 50 ppm, reduce/enlarge (25-400%), paper saver (2-up and 4-up), collation, darkness adjustment, original size to output size selection, copy select 1-999, date/time stamp, single-pass duplex, message overlay, priority copy (job interrupt), copy countdown
Fax	Speed: 33.6 bps max.; transmission speed: approximately 3 seconds per page; resolution: 200 x 100 dpi, 200 x 200 dpi, 300 x 300 dpi, 400 x 400 dpi; fax redirect, group fax, manual fax, fax from PC, up to 512-character shortcuts, fax preservation, LDAP lookup, Caller ID, speed dials, block junk faxes
Scan	Output resolutions: up to 600 x 600 dpi black, up to 300 x 300 dpi color; scan destinations: Network TWAIN, USB Direct Interface, e-mail, FTP, LDSS, Scan-to-PC; File Formats: TIFF, JPG, PDF; legal-size from flatbed; duplex scanning
Operating Systems	Microsoft Windows, Mac, NetWare, UNIX and Linux
Acoustics	Printing: 56 dBA; Copying: 57 dBA; Scanning: 52 dBA; Idle: 30 dBA
Size (WxDxH)	22 in. x 25.4 in. x 28 in. (560 mm x 645 mm x 710 mm)
Weight	84.5 lb. (37.7 kg)

Media Specifications


Paper Capacity (sheets) Standard Maximum	Input: 600 (500 + 100 MPF); Output: 500 Input: 3,100 (500 + 500 + 2000 + 100 MPF); Output: 500
Paper Sources Standard Maximum	Input: 2; Output: 1 Input: 4; Output: 1
Media Information Types	Plain paper, paper labels, card stock, transparencies, envelopes, vinyl labels, polyester labels, dual web and integrated labels
Size	Letter, Legal, A4, A5, JIS B5, Executive, Folio, Statement, Universal (2.75 in. x 5 in. to 8.5 in. x 14 in), envelopes (7 3/4, 9, 10, DL, C5, B5)
Weight	Plain paper: 16 to 47 lb. (60 to 176 g/m ²); Card stock: up to 110 lb. (199 g/m ²)

Shipping Dimensions

Lexmark X646e
Size: 29.9 x 26.5 x 32.7
Weight: 93 lb.

Part Numbers

Supplies	32,000-page Extra High Yield Return Program Print Cartridge ¹	X644X11A	
	32,000-page Extra High Yield Return Program Print Cartridge for Label Applications ¹	X644X01A	
	21,000-page High Yield Return Program Print Cartridge ¹	X644H11A	
	21,000-page High Yield Return Program Print Cartridge for Label Applications ¹	X644H01A	
	10,000-page Return Program Print Cartridge ¹	X644A11A	
	32,000-page Extra High Yield Print Cartridge ¹	X644X21A	
	21,000-page High Yield Print Cartridge ¹	X644H21A	
	10,000-page Print Cartridge ¹	X644A21A	
	Routine Maintenance Items:		
	Separator Roll Kit	40X0454	
	Pick Up Assembly	40X0453	
	Pressure Pad Cushion	40X0466	
	Charge Roll Kit	40X0127	
	Transfer Roll Kit	40X0130	
Label Fuser Wiper	40X2665		
Pick Tires	40X0070		
Fuser Maintenance Kit	40X0100		
Memory Options	128MB SDRAM	13N1523	
	256MB SDRAM	13N1524	
	512MB SDRAM	13N1526	
	32MB Flash Card	1021208	
	64MB Flash Card	1021209	
Furniture	Low Profile MFP Stand	16C0379	
	MFP Stand with Cabinet	16C0369	
	MFP Stand	16C0389	
Warranty	1-year, next business day Onsite Repair	Base	
	1-year Onsite Repair	2348322	
	2-year Onsite Repair	2348323	
	3-year Onsite Repair	2348324	

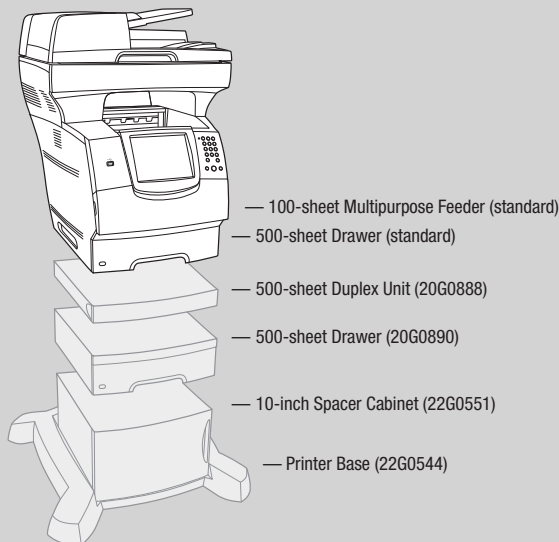

Options Not Pictured

250-sheet Drawer	20G0889
250-sheet Tray	20G0879
500-sheet Tray	20G0884
250-sheet Universally Adjustable Drawer	20G1223
400-sheet Universally Adjustable Drawer	20G1218
250-sheet Universally Adjustable Tray	20G1224
400-sheet Universally Adjustable Tray	20G1217
2000-sheet Drawer (letter only)	20G0892
85-sheet Envelope Feeder	20G0891

¹ Declared standard page yield value in accordance with ISO/IEC 19752

Additional Part Numbers

Solutions	Font Cards	
	Traditional Chinese Font Card	1021242
	Japanese Font Card	1021243
	Korean Font Card	1021240
	Simplified Chinese Font Card	1021241
	Bar Code Card	22G0350
	PRESCRIBE Card	22G0354
	Card for IPDS and SCS/TNe	22G0351
Connectivity	External Print Servers	
	N4050e Wireless 802.11g Print Server ²	14T0145
	Internal Print Servers ³	
	MarkNet N8020 Gigabit Ethernet	14S0200
	MarkNet N8030 Fiber Ethernet	14S0220
	MarkNet N8050 802.11g Wireless	14S0165
Cables	10-foot Parallel Cable	1021231
	6-foot USB Cable	1021294
Adapters	Parallel 1284-B Interface Card	1021091
	RS-232C Serial Interface Card	1021092
Media	Transparencies (letter)	70X7240

Terms & Conditions

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett Packard Company. The USB logo is a trademark of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2007 Lexmark International, Inc. All rights reserved.

71K5017

¹ Declared yield in accordance with ISO/IEC 197520

² Requires USB connection

³ Use of an Internal Print Server disables the Ethernet card resident in the printer